

# Innera Piatto


## Installation configurations:

### In Desk

In any requirement of Hidden power and data station beneath the surface with very easy installation procedure.

### In Wall / In Panel


it can be mounted in walls/panels, whenever power and data stations are required with avoiding the need to make changes in the construction or to use electrician.

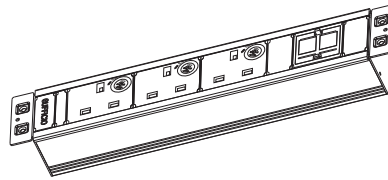

IP-40



IP-54G

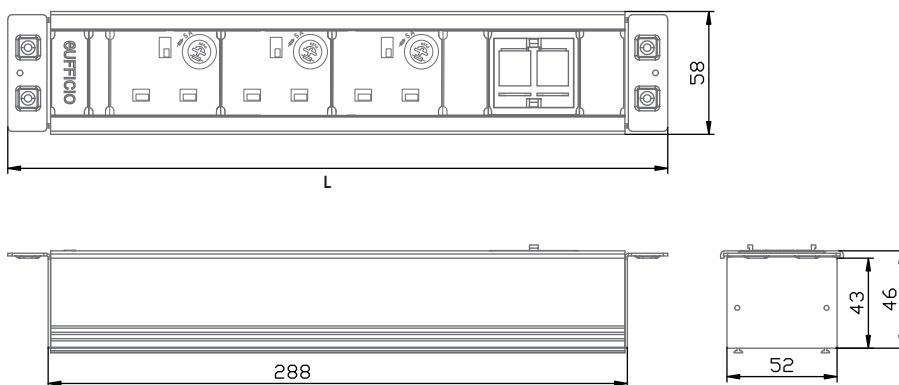

## Power & Temperature:

Operating voltage: 230VAC 50VHz

Maximum current: 13A

Work Temperature: up to 70°C

## Structure & color:

Compact, but with solid and durable structure, you will find Innera Piatto is reliable unit with long life expectation. Innera Piatto is available in Silver anodized frame - black sockets and end caps. Custom colors available on demand – minimum order will be required. Materials: cover - aluminium, sockets - PC.

## Modules & combination:

The Connecto Key can be configured with power, Charge, Data, communication and more.

## Cable and connection to power:

\* The Innera Piatto is supplied with:

INPUT - 0.1 meter cable (HO5VV-F 3x1.5mm<sup>2</sup>) with male GST 18/3 connector

OUTPUT - 0.1 meter cable (HO5VV-F 3x1.5mm<sup>2</sup>) with female GST 18/3 connector.

In order to connect the product to power you should buy the power cable separately.

**Testing:** 100% testing

continuity, polarity, insulation & earth

**Certifications:** BS 5733, CE

**Warranty:** 3 years Warranty by German registered company

**Installation:** No Tools required, supplied with installation

kit for attaching to a desired surface.

Please read the installation instruction prior to installation.

**Packing:** each item in a box

Catalog No	Model	Description	Length (L) mm	Depth (W) mm	Height (H) mm
0726811932155	IP-86G	6 BS sockets , 4 keystone adapters	560	48.2	58
0726811927571	IP-64G	4 BS sockets , 2 keystone adapters	470	48.2	58
0726811927625	IP-43G	3 IBS sockets , 2 keystone adapters	262	48.2	58
0726811931813	IP-20	4 keystone adapters	176	48.2	58
0726811931820	IP-40	8 keystone adapters	262	48.2	58
0726811927588	IP-55G	5 BS sockets	430	48.2	58
0726811927670	IP-32G	2 BS sockets , 2 keystone adapters	262	48.2	58
0726811927656	IP-33G	3 BS sockets	262	48.2	58
0726811927601	IP-54G	4 BS sockets , 2 keystone adapters	430	48.2	58

\* Only on models with power socket